



SOUL_S
height 1540 mm, length 550 mm. Pearl White finish (cod. 16).

Technical features:

- steel towel warmer radiator
- horizontal elements featuring rectangular 50x10 mm section tubes
- side round manifolds with a 30 mm diameter
- manifold threading 1/2" Gas right
- maximum working pressure 4 bar
- maximum working temperature 95°C
- 50 mm connection
- not suitable for installation with a single-pipe system


Price included:

- 4 wall fixing in the same color as the radiator
- 2 1/2" hidden air vents complete with valve cover


Finishes available	Surcharge	Connection dimensions with IRSAP valves
Standard White		
Classic finished		
Special finished		
Other RAL colors		
Finishing codes see page 596.		

50 mm REVERSIBLE connection

The radiator can be installed with the 50 mm headers on the left or right by simply rotating the product by 180°.








Type with collectors on the left
Hydraulic connection 50 mm

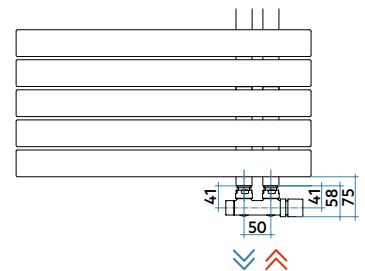


Type with collectors on the right
Hydraulic connection 50 mm

TYPICAL INSTALLATION FOR ALL RADIATORS USING A TEE

“A” quota for IRSAP angle pattern valves and lockshield valves = 40 mm

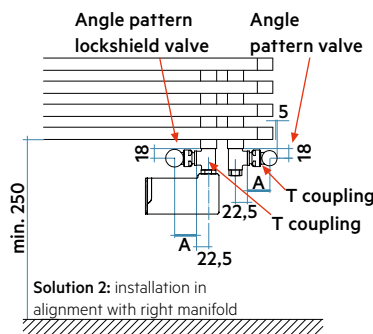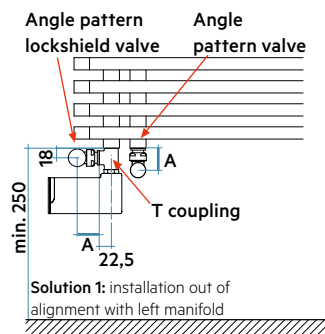

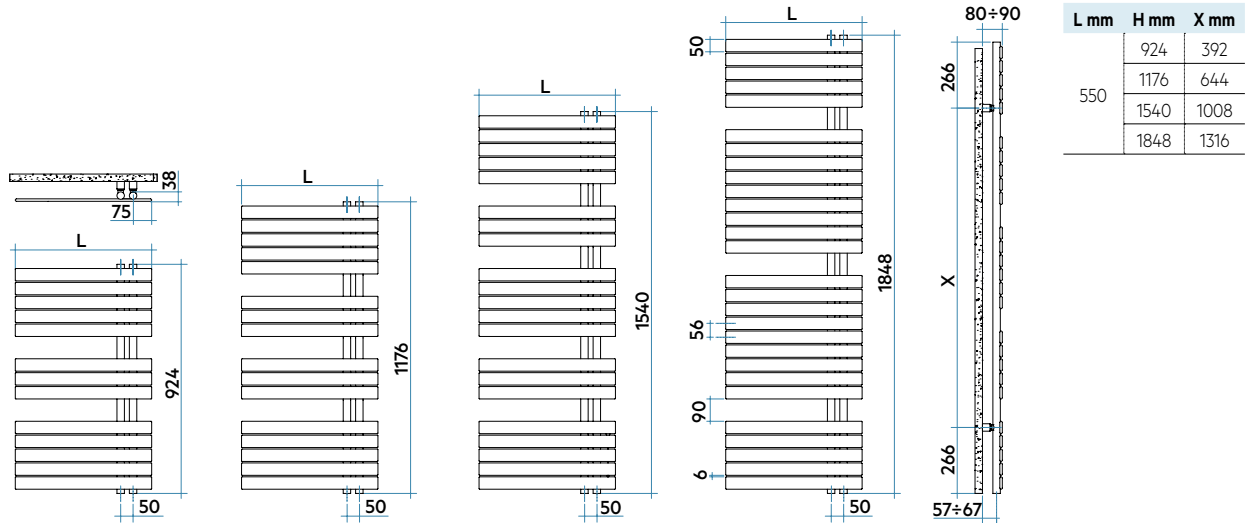

Model	Code	Depth mm	Height mm	Width mm	Conn. centre mm	Weight Kg	Cap. lt	Thermal Power				Exp. n.	
								$\Delta t=50^{\circ}\text{C}$ Btu/h	$\Delta t=50^{\circ}\text{C}$ Watt	$\Delta t=40^{\circ}\text{C}$ Watt	$\Delta t=30^{\circ}\text{C}$ Watt (*)		$\Delta t=20^{\circ}\text{C}$ Watt
924 13 rails 2 espaces	URP055 B 01 IR 01 NNN	38	924	550	50	9,4	3,2	1391	408	309	216	130	1,245
1176 16 rails 3 espaces	URS055 B 01 IR 01 NNN	38	1176	550	50	11,5	4,1	1723	505	379	262	155	1,286
1540 21 rails 4 espaces	URM055 B 01 IR 01 NNN	38	1540	550	50	15,0	5,3	2235	655	491	338	200	1,295
1848 28 rails 3 espaces	URE055 B 01 IR 01 NNN	38	1848	550	50	19,4	7,3	2815	825	616	423	248	1,310

Mix. Funct.	Code
400 Watt	ANRES400WDI
400 Watt	ANRES400WDI
700 Watt	ANRES700WDI
1000 Watt	ANRES1000WDI

Electric heater for Dual Power

BATHROOMS
RADIATORS


(*) Thanks to the high performance of Irsap SOUL_S radiators, the ideal Δt for low temperature projects is Δt at 30°C.

For Δt different from 50°C use the formula: $Q=Q_n (\Delta t / 50)^n$


To order a radiator in the mixed version put the code of the Standard version + the code of the corresponding electric heater

Example: Mod. 1540 x 550: **URM055 B 01 IR 01 NNN** (€ 478,00) + **ANRES700WDI** (€ 183,57) = Tot. € 661,57


Key Codes

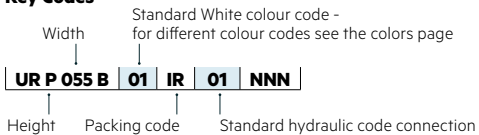


Decorative & Technical Accessories



Kit Valves and Lockshield valve
Pag. 562



Pipe cover kit
Pag. 566



Electronic Control
Pag. 574

